


# Data sheet

## Nickel Thin Film Temperature Sensor

GFS Gesellschaft für Sensorik mbH  
 Grubenstr. 2  
 D-78052 Villingen Schwenningen  
 Tel: +49(0) 77 21/ 8475-0  
 Fax: +49(0) 77 21/ 8475-75  
 Web: www.GFSGermany.de

Ni 1000 DIN 43760  
 Part number: 100 489

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring.

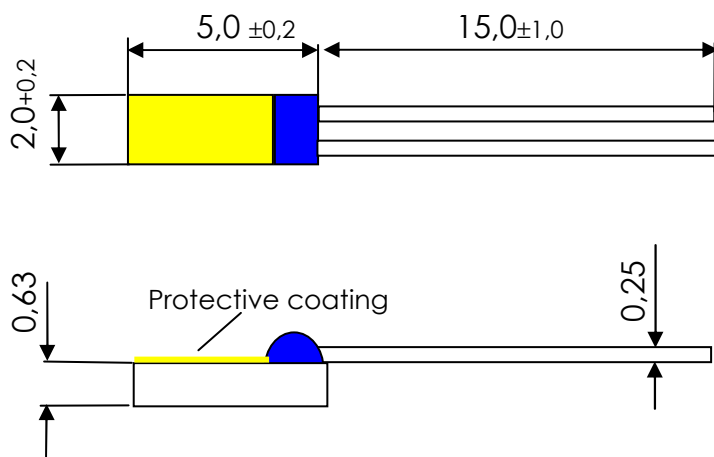

Dimensions in mm

Nominal resistance $R_0$	1000 ohm
Characteristic	DIN 43760
Temperature coefficient 0°C/100°C	6180 ppm/K
Tolerance	DIN 43760*
Operating temperature range	-60°C to 250°C
Self heating in air	0,3 K/mW
Thermal response time $t_{0,9}$ (Water 0,2 m/sec)	0,3 sec
Thermal response time $t_{0,9}$ (air 1 m/sec)	9 sec
Operating current max.	5 mA
Connector wire material	nickel
Protective coating	high-temperature epoxy

Polynomial of a nickel resistor in accordance with DIN 43760:

$$R(\vartheta) = R_0 \times (1 + 5,481 \times 10^{-3} \times \vartheta + 6,650 \times 10^{-6} \times \vartheta^2 + 2,805 \times 10^{-11} \times \vartheta^4 + 2,000 \times 10^{-17} \times \vartheta^6)$$

\* Maximum permissible tolerance as a function of temperature (DIN 43760):

$$\vartheta < 0^\circ\text{C}: \quad F = \pm(0,4 + 0,028 \times \vartheta) \text{ } ^\circ\text{C}$$

$$\vartheta > 0^\circ\text{C}: \quad F = \pm(0,4 + 0,007 \times \vartheta) \text{ } ^\circ\text{C}$$

All technical data serves as a guideline and does not guarantee any particular properties to the product.