

# Data sheet


## Nickel Thin Film Temperatur Sensor

**Ni 500 TC 5000 SMD1206**  
**Part number: 100 050**

**GFS Gesellschaft für Sensorik mbH**  
 Grubenstr. 2  
**D-78052 Villingen Schwenningen**  
 Tel: +49(0) 77 21/ 8475-0  
 Fax: +49(0) 77 21/ 8475-75  
 Web: www.GFSGermany.de

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring.

Dimensions in mm

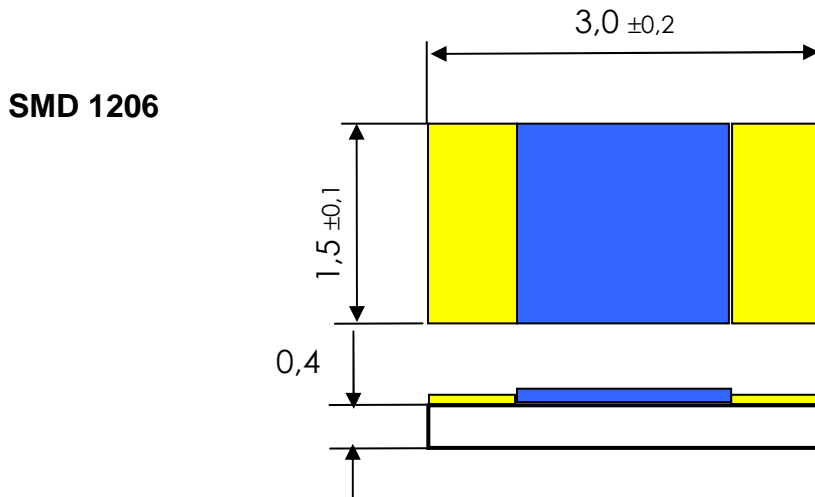

Resistive value at 0°C	500 ohm
Characteristic	TC5000
Temperature Coefficient 0°C/100°C	5000 ppm/K
Tolerance	DIN 43760*
Operation temperature range	-60°C bis 200°C
Self heating in air	0,5 K/mW
Thermal response time $t_{0,9}$ (water 0,2 m/sec)	0,3 sec
Thermal response time $t_{0,9}$ (air 1 m/sec)	9 sec
Operating current max.	5 mA
Soldering pad material	nickel, gold plated
Protective coating	high-temperature epoxy

Polynomial of the nickel resistor

$$R(\vartheta) = R_0 \times (1 + 4,427 \times 10^{-3} \times \vartheta + 5,172 \times 10^{-6} \times \vartheta^2 + 5,585 \times 10^{-9} \times \vartheta^3)$$

\* Maximum permissible tolerance as a function of temperature (DIN 43760)

Für  $\vartheta < 0^\circ\text{C}$ :  $F = \pm(0,4 + 0,028 \times \vartheta) \text{ } ^\circ\text{C}$

Für  $\vartheta > 0^\circ\text{C}$ :  $F = \pm(0,4 + 0,007 \times \vartheta) \text{ } ^\circ\text{C}$

All technical data serves as a guideline and does not guarantee any particular properties to the product.