


# Data sheet

## Nickel Thin Film Temperature Sensor

Ni 120 TC 6720  
Part number: 100 485-4

GFS Gesellschaft für Sensorik mbH  
Grubenstr. 2  
D-78052 Villingen Schwenningen  
Tel: +49(0) 77 21/ 8475-0  
Fax: +49(0) 77 21/ 8475-75  
Web: www.GFSGermany.de

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring.

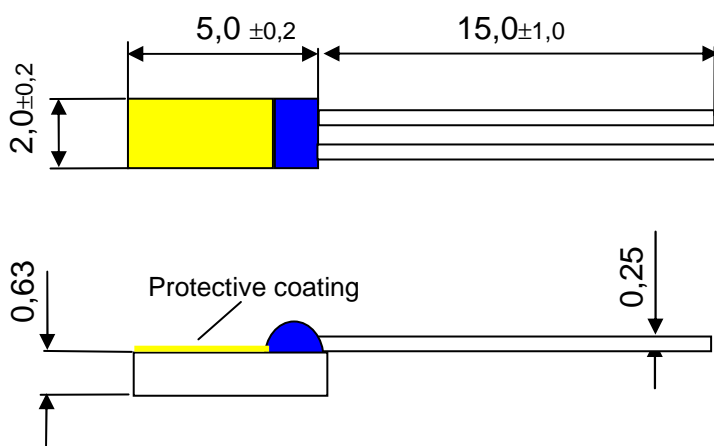

Dimensions in mm

Nominal resistance $R_0$	120 ohm
Temperature coefficient 0°C/100°C	6720 ppm/K
Tolerance	DIN 43760 (-60°C to 125°C)
Operating temperature range	-60°C to 250°C
Self heating in air	0,3 K/mW
Thermal response time $t_{0,9}$ (Water 0,2 m/sec)	0,3 sec
Thermal response time $t_{0,9}$ (air 1 m/sec)	9 sec
Operation current max.	5 mA
Connector wire material	nickel
Protective coating	high-temperature epoxy

Polynomial of the resistive characteristic:

$$R(\vartheta) = R_0 \times (1 + 5,88 \times 10^{-3} \times \vartheta + 7,872 \times 10^{-6} \times \vartheta^2 + 4,71 \times 10^{-9} \times \vartheta^3)$$

Maximum permissible tolerance as a function of temperature (DIN 43760):

$$\vartheta < 0^\circ\text{C}: \quad F = \pm(0,8 + 0,056 \times \vartheta) \text{ } ^\circ\text{C}$$

$$\vartheta > 0^\circ\text{C}: \quad F = \pm(0,8 + 0,014 \times \vartheta) \text{ } ^\circ\text{C}$$

All technical data serves as a guideline and does not guarantee any particular properties to the product.